



How to use:

Visitor press call button on the door unit and then listen to the "Electronic-Tone" sound from the room unit. Tenant pick up handset on room unit and talk to visitor. Upon confirming visitor identity, just press the button on room unit to open door. Volume can be adjusted using a knob on room unit.

Secure your life style . . .

Know your visitor before letting them come in ...



DP-KD / DR-4D
1-to-1 DC battery operated



DPRA01 / DR2K
1-to-2 direct AC




DP201R / DR2K
1 to 1 direct AC

Specifications

DP-KD / DR-4D	DPRA01 / DR2K	DP201R / DR2K
Power source 4 pcs x 1.5V (AA size battery) Idling: 15mA.	AC230, 50-60Hz 70mW across 8 ohm	AC230, 50-60Hz 40mW across 8 ohm
Call sound output power Chime signal: 210mW.	High 400mW across 8 ohm Low 100mW across 8 ohm	High 300mW across 8 ohm Low 50mW across 8 ohm
Effective wiring distance 300m using 0.65mm copper wire	Room to room: 30m using 0.65mm wire Room to door: 50m using -0.65mm wire	Room to door: 50m using 0.8mm copper wire
Dimension (cm) Room station: 4.35(D) x 9.85(W) x 21.5(H) cm Door station: 12.5(D) x 10(W) x 3(H) cm	Room station: 23(D) x 8.8(W) x 7(H) cm Door station: 12.8(D) x 10(W) x 4(H) cm	Room station: 23(D) x 8.8(W) x 7(H) Door station: 12.8(D) x 10(W) x 4(H)
Packaging dimension 32 x 21 x 5.5 cm (cm)	25.5 x 8 x 31 cm	16 x 13 x 24.5 cm
Weight (g) 0.8 kg	1.8 kg	1.2 kg
Wiring 4 wire from room unit to door unit. 4 wire from room unit to electric lock.	7 wire from master to sub room unit. 2 wire from sub room unit to electric lock. 2 wire from master unit to door unit. AC power to sub room unit.	2 wire from room unit to door unit. 2 wire from room unit to electric lock. AC power to room unit.

Connections Diagram

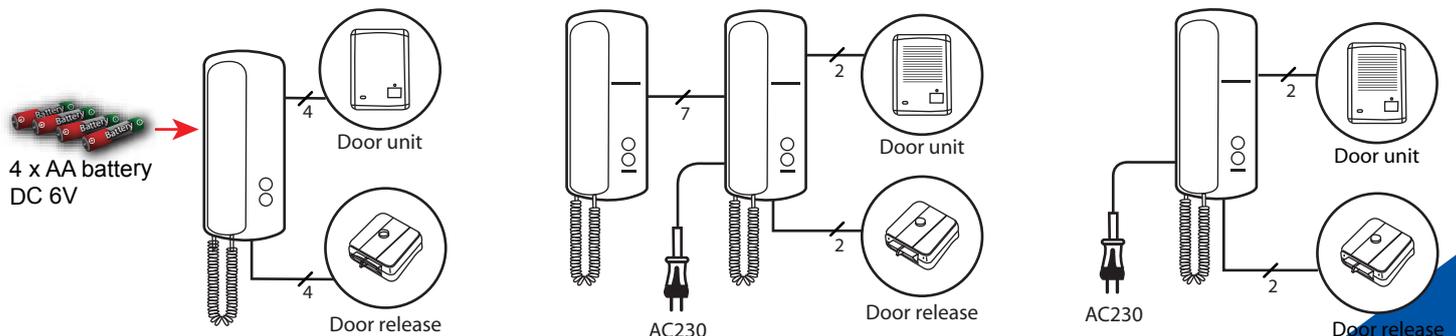



Up to 12 unit TP12AC (room unit) can be linked together for simultaneous conversation. TP12AC help facilitate efficient inter-office private communication. For example, office staff can just call up to factory side instead physically walking to the factory just to talk with the person there. TP12AC can be linked to DR-DW2N door unit.

How to use:

Room to room(s). Lift handset and call the desired room unit by pressing its number. To talk with other room unit(s) simultaneously (conference call), just press their corresponding numbers.


Global paging. Lift handset and press paging button. This will simultaneously ring up all room unit(s). There is an option to enable or disable this function in each room unit.

Room to door. Visitor press call button on DRDW2N to ring up all room unit (two tone chime sound). Tenant pick up handset to talk with visitor. Upon confirm identity, tenant press button "1" to open door. While talking to other room unit, there will be a faint call sound on handset if some one pressed the door unit.

Specifications

Power source	DC12V, 100mA
Effective wiring distance	500m using 0.65mm copper wire
Dimension (cm)	Room station: 2.3(D) x 8.8(W) x 7(H) Door station: 12.8(D) x 10(W) x 4(H)
Packaging dimension (cm)	13 x 8.5 x 25 cm
Weight (kg)	0.8 kg
Wiring	4 common wire to link all TP12AC and DRDW2N.

Connections Diagram

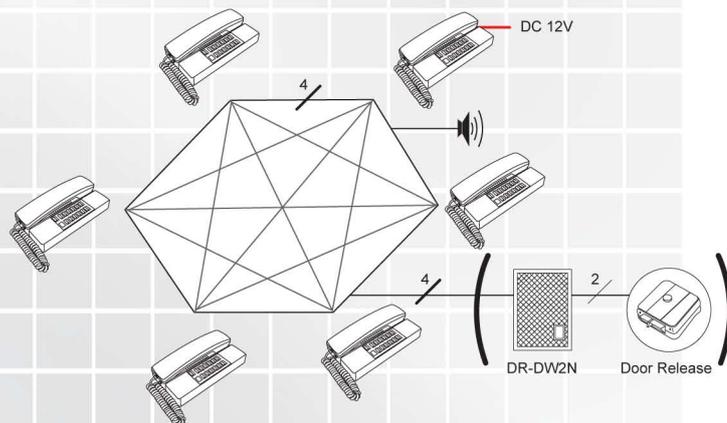

TP12AC
12-ways interphone
handset



DR-DW2N
Weatherproof door unit

